





15 ft. CABLE



BPC-49940-3/AUTO/BOX/WO

SPECIFICATIONS


- TYPE:----- DIGITAL
- DISPLAY:----- 4-DIGIT, 7 SEGMENT RED SUPER BRIGHT LED
- CHARACTER HEIGHT:----- 4" (101.6 mm) 9 THOUSAND 9 HUNDRED AND 99
- VISIBILITY:----- 250 Ft. (76.2 METERS)
- POWER REQUIREMENTS:-- 100-240V 50~60Hz (**SWITCHING POWER SUPPLY**)
- FRAME:----- 18.25" x 30.25" x 1.5" (**Black Anodized Aluminum**)
- WEIGHT:----- 11.5 lbs.
- OPERATING TEMP.:----- -17°TO 182°F
- HUMIDITY:----- 0% TO 95% NON-CONDENSING
- OPERATING MODE ----- ACTUAL COUNT UP BY 1. GOAL HAS AUTOMATIC ADVANCE BY TAKT TIMER WITH RUN/HOLD AND RESET CONTROL.

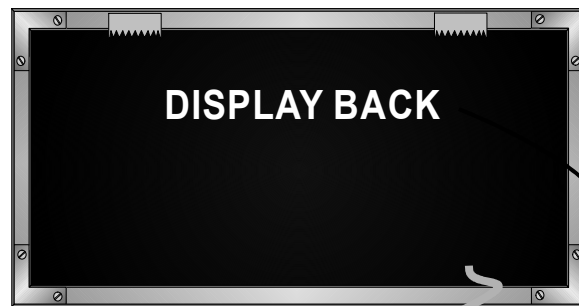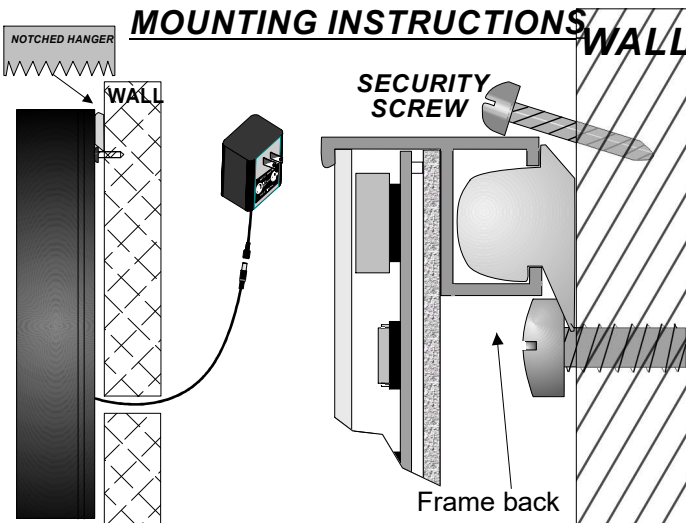

PLC OR SWITCH
N.O. DRY CONTACT
MOMENTARY

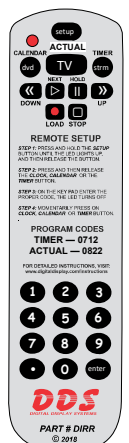

BPC-49940-3 Setting Instructions

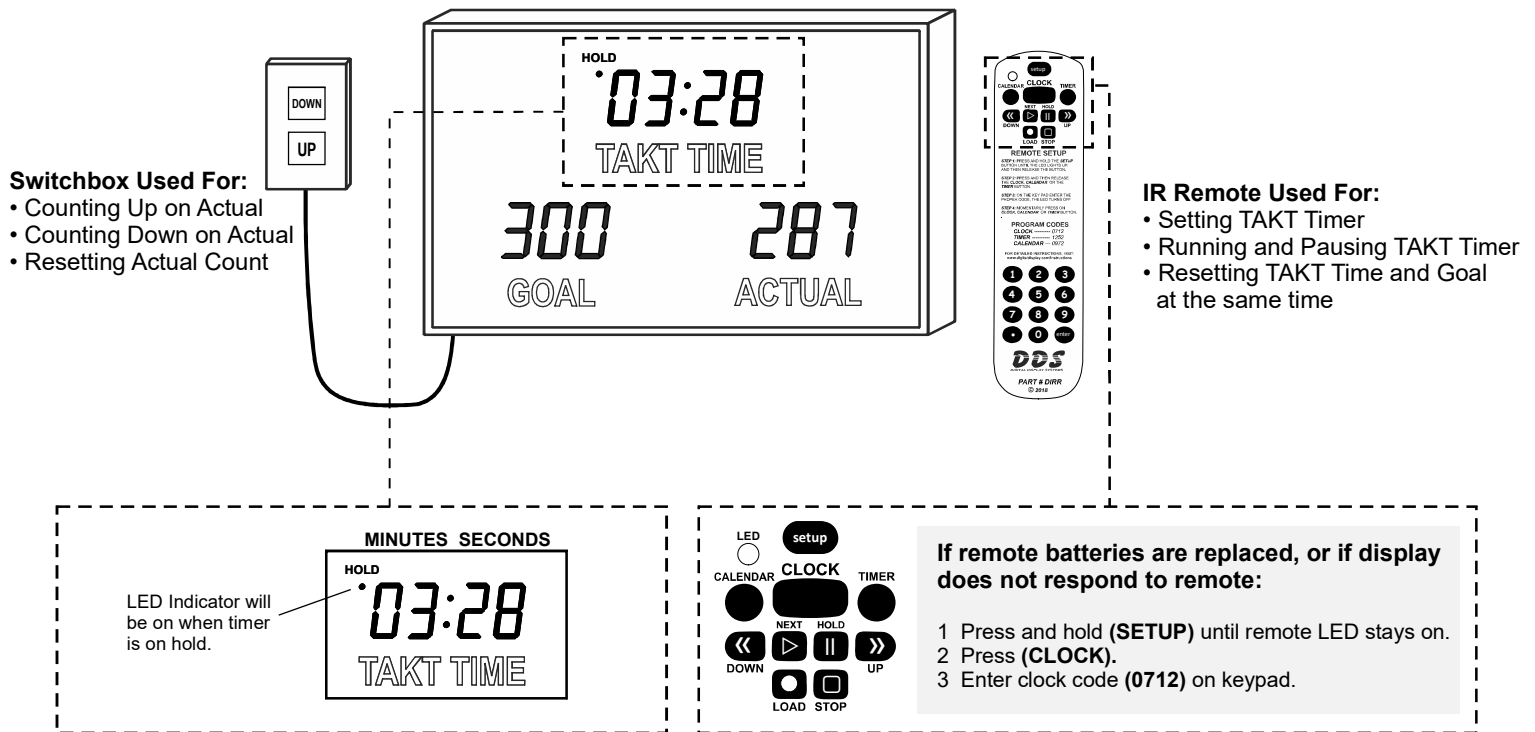

Switchbox

To Count Up or Down:

Press **(UP)** switch once to count up by one.
Press **(DOWN)** switch once to count down by one.

To Fast Count:

Press and hold **(UP)** switch for over 3 seconds to fast count up.
Press and hold **(DOWN)** switch for over 3 seconds to fast count down.

To Reset to Zero:

Press and hold both **(UP)** and **(DOWN)** switches down for over 5 seconds to reset.

IR Remote

To Put Timer on Hold / To Start Timer:

To put timer and goal on hold, press **(HOLD)**. The run timer and goal, press **(HOLD)** again. The LED indicator on the top left of the timer will be on when the display is on hold.

To Set Countdown Timer:

First put timer on hold by pressing **(HOLD)**. Press **(ENTER)** and the digits will flash. Key in start time in minutes and seconds. If you make an error, press **(STOP)**. Press **(Enter)** again to accept.

To Reset Goal Counter & Takt Timer:

When Goal/Takt Timer display is on hold, press **(LOAD)** once to reset both at the same time.

To Start Goal at a Different Number:

1. Put Timer on hold by pressing **(HOLD)**. Reset Timer and Goal by pressing **(LOAD)**.
2. Press **(ENTER)** to make the Timer digits flash, key in "1" for one second. Press **(ENTER)** again.
3. Press **(HOLD)** again to let the Timer run and the Goal Count will count up by one every one second. When Goal is at desired starting point, press **(HOLD)** to pause timer.
4. Set Takt Timer to original run time, and press **(HOLD)** to run normally.